





KENAR RAYUSYU PAH/HAUSA, TOLERANSI (mm) / TOLERANCES FOR RADII, CHAMFER, COUNTERSING (mm)	
DIN ISO 2768T1	5±0 ±3
INCE/FINE - f	±0.2
ORTA/MEDIUM - m	±0.5
KABA/COARSE - g	±0.4
	±1
	±2

Drawn on computer; modifications by hand are not allowed!
This document is in the property of KALE KILIT ve KALIP SAN. A.Ş.
It may not be copied, reproduced or issued to
third parties without written authority from the proprietor.

Bilgisayar ile çizilmiştir; elle düzeltme yapılamaz!
KALE KILIT ve KALIP SANAYİ A.Ş. malı olan bu dokümanın tamamının veya bir kısmının yazılı bir izin alınmaksızın kopya edilmesi, başka bir yerde kullanılması veya üçüncü şahıslara verilmesi yasaktır ve yasal işleme yol açar.

[illegible]

 Fonksiyonel Ölçüler / Functional Dimensions

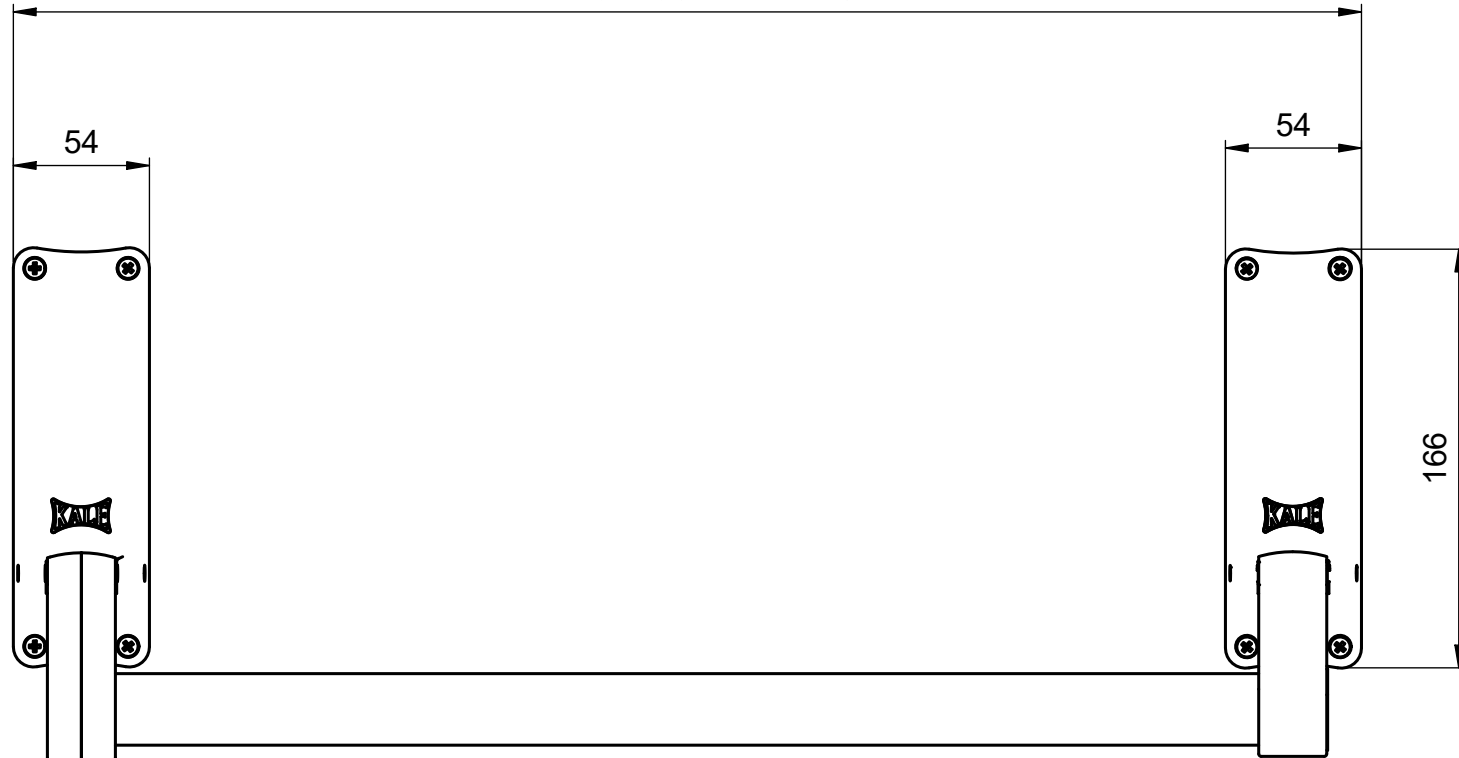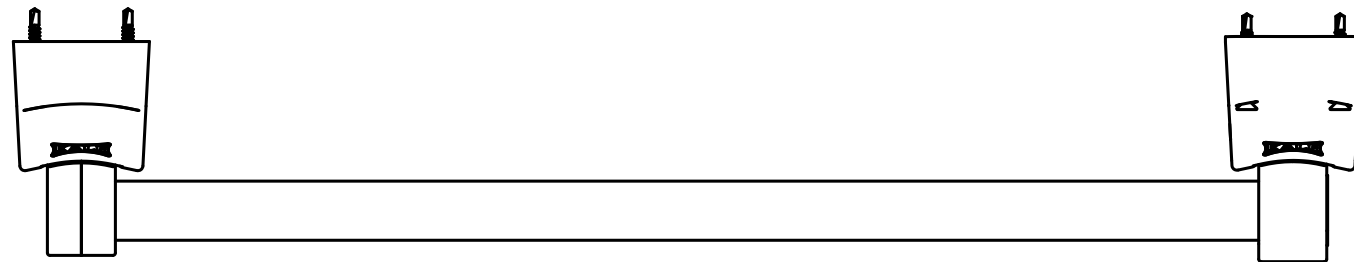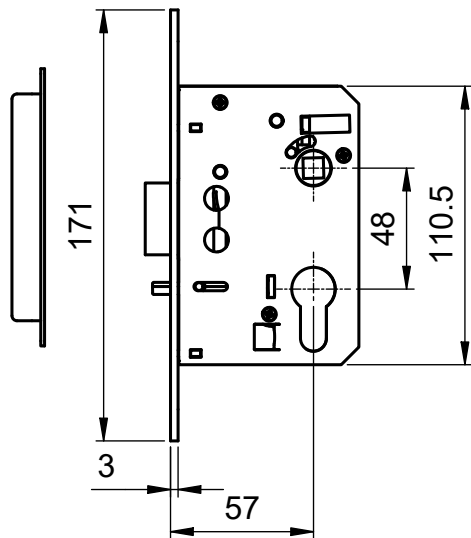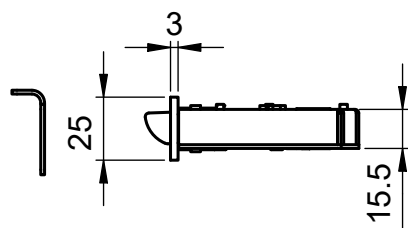

max:1300 mm kapıya uygun, boru ölçüsü kesilebilir

PANİK BAR GÖMME KİLİTLİ

KD040/30-282B

Sembol Index	Tarih Date	Model Değişiklik No E.C.R. No	Değişiklikler Revisions		Çizen Drawn	Kontrol Checked
Model/Model:						 KALE KİLİT
Malzeme/Material:				Ölçek/Scale:		
Genel Tol./Gen. Tol.	DIN ISO 2768-1	Tarih/Date	İmza/Signature	Parça Adı/Part Name		
Çizen/Drawn						
Kontrol/Checked						
Onay/Approved						
Resim No/Drawing No:			Parça No/Part No:			